

# MULTI-ML: PROGRAMMING MULTI-BSP ALGORITHMS IN ML

VICTOR ALLOMBERT, FRÉDÉRIC GAVA AND JULIEN TESSON

Laboratory of Algorithmic Complexity and Logic  
Université Paris-Est

SIAM PP16 - PARIS



# Table of Contents

① Introduction

② Multi-ML

③ Results

④ Conclusion

# Table of Contents

- 1 Introduction
  - OCAML
  - BSML
  - MULTI-BSP
- 2 Multi-ML
- 3 Results
- 4 Conclusion

## Ocaml : a ML language



### Strengths of Ocaml

- A functional programming language
- A powerful type system
- User-definable algebraic data types and pattern matching
- Automatic memory management
- Efficient native code compilers

## Syntaxe overview

```
# let f = fun x -> "Hello "^(string_of_int x) in
  let lst = [0;1;2] in
    List.map f lst;;
- : string list = ["Hello 0"; "Hello 1"; "Hello 2"]

# let pair = ([0;1;2],true);;
val pair : int list * bool = ([0; 1; 2], true)

# type 'a list =
  Nil
  | Node of 'a*'a list ;;
type 'a list = Nil | Node of 'a * 'a list
```

# Bulk Synchronous ML

What is BSML?



# Bulk Synchronous ML

## What is BSML?

- Explicit BSP programming with a functional approach



# Bulk Synchronous ML

## What is BSML?

- Explicit BSP programming with a functional approach
- Based upon ML an implemented over OCAML





# Bulk Synchronous ML

## What is BSML?

- Explicit BSP programming with a functional approach
- Based upon ML an implemented over OCAML
- Formal semantics  $\rightarrow$  computer-assisted proofs (COQ)




# Bulk Synchronous ML

## What is BSML?

- Explicit BSP programming with a functional approach
- Based upon ML an implemented over OCAML
- Formal semantics  $\rightarrow$  computer-assisted proofs (COQ)

## Main idea

Parallel data structure  $\Rightarrow$  Vector:

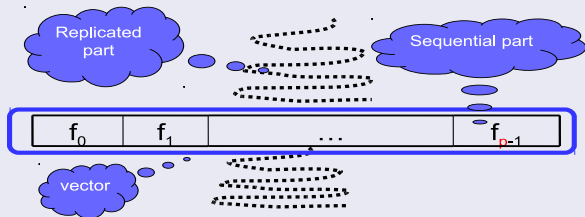

## Asynchronous primitives

### Asynchronous primitives

- `<< e >>` :  $\langle e, \dots, e \rangle$

### Asynchronous primitives

- $\langle\langle e \rangle\rangle$  :  $\langle e, \dots, e \rangle$
- $\$v\$$  :  $v_i$  on processor  $i$ , assumes  $v \equiv \langle v_0, \dots, v_{p-1} \rangle$

### Asynchronous primitives

- `<< e >>` :  $\langle e, \dots, e \rangle$
- `$v$` :  $v_i$  on processor  $i$ , assumes  $v \equiv \langle v_0, \dots, v_{p-1} \rangle$
- `$pid$` :  $i$  on processor  $i$

### Asynchronous primitives

- `<< e >>` :  $\langle e, \dots, e \rangle$
- `$v$` :  $v_i$  on processor  $i$ , assumes  $v \equiv \langle v_0, \dots, v_{p-1} \rangle$
- `$pid$` :  $i$  on processor  $i$

### Synchronous primitives

- `proj` :  $\langle x_0, \dots, x_{p-1} \rangle \mapsto (\mathbf{fun} \ i \rightarrow x_i)$

### Asynchronous primitives

- `<< e >>` :  $\langle e, \dots, e \rangle$
- `$v$` :  $v_i$  on processor  $i$ , assumes  $v \equiv \langle v_0, \dots, v_{p-1} \rangle$
- `$pid$` :  $i$  on processor  $i$

### Synchronous primitives

- `proj` :  $\langle x_0, \dots, x_{p-1} \rangle \mapsto (\text{fun } i \rightarrow x_i)$
- `put` :  $\langle f_0, \dots, f_{p-1} \rangle \mapsto \langle (\text{fun } i \rightarrow f_i \ 0), \dots, (\text{fun } i \rightarrow f_i \ (p-1)) \rangle$



## Code example

For a BSP machine with 3 processors:

```
# let vec = << "Hello" >>;;
val vec : string par = <"Hello", "Hello", "Hello">

# let vec2 = << $vec$^(string_of_int $pid$) >>;;
val vec2 : string par = <"Hello0", "Hello1",
  ↪ "Hello2">

# let totex v = List.map (proj v) procs;;
val totex : 'a par -> 'a list = <fun>

# totex vec2;;
- : string list = ["Hello0"; "Hello1"; "Hello2"]
```

# The MULTI-BSP model

What is MULTI-BSP?

# The MULTI-BSP model

## What is MULTI-BSP?

- 1 A tree structure with nested components

# The MULTI-BSP model

## What is MULTI-BSP?

- ① A tree structure with nested components
- ② Where nodes have a storage capacity

# The MULTI-BSP model

## What is MULTI-BSP?


- ① A tree structure with nested components
- ② Where nodes have a storage capacity
- ③ And leaves are processors

# The MULTI-BSP model

## What is MULTI-BSP?

- 1 A tree structure with nested components
- 2 Where nodes have a storage capacity
- 3 And leaves are processors

MULTI-BSP

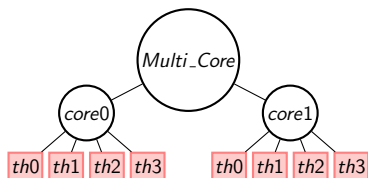


# The MULTI-BSP model


## What is MULTI-BSP?

- 1 A tree structure with nested components
- 2 Where nodes have a storage capacity
- 3 And leaves are processors

MULTI-BSP

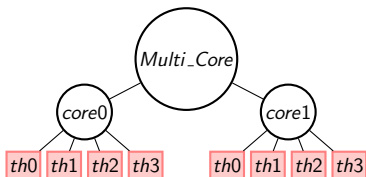


BSP



# The MULTI-BSP model

## Execution model

A level  $i$  superstep is:

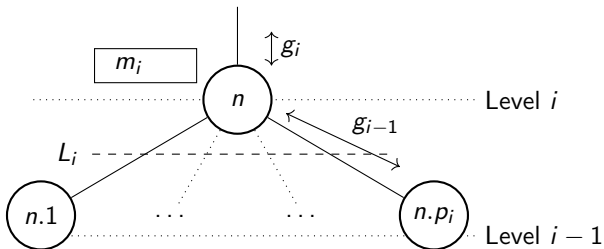




# The MULTI-BSP model

## Execution model

A level  $i$  superstep is:

- Level  $i - 1$  executes code independantly

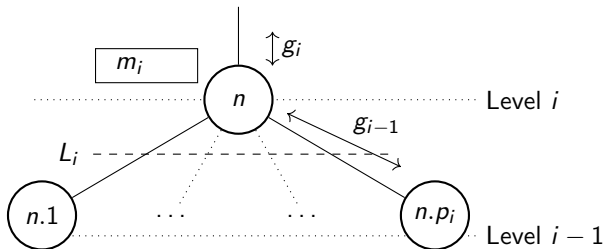


# The MULTI-BSP model

## Execution model

A level  $i$  superstep is:

- Level  $i - 1$  executes code independantly
- Exchanges informations with the  $m_i$  memory

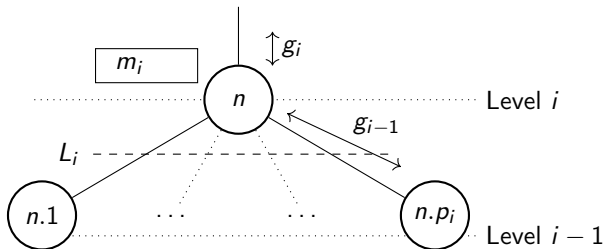


# The MULTI-BSP model

## Execution model

A level  $i$  superstep is:

- Level  $i - 1$  executes code independently
- Exchanges informations with the  $m_i$  memory
- Synchronises

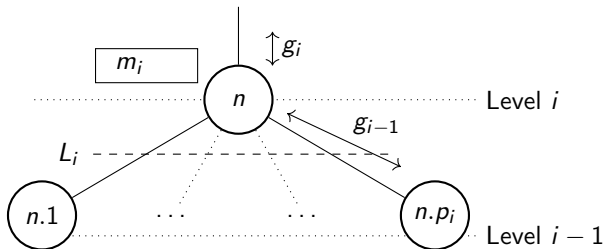

# Table of Contents

## 1 Introduction

## 2 Multi-ML

Overview

Primitives

Semantics

Typing

Implementation

## 3 Results

## 4 Conclusion

## Basic ideas

## Basic ideas

- BSML-like code on every stage of the MULTI-BSP architecture

## Basic ideas

- BSML-like code on every stage of the MULTI-BSP architecture
- Specific syntax over ML: eases programming


## Basic ideas

- BSML-like code on every stage of the MULTI-BSP architecture
- Specific syntax over ML: eases programming
- *Multi-functions* that recursively go through the tree.



## Basic ideas

- BSML-like code on every stage of the MULTI-BSP architecture
- Specific syntax over ML: eases programming
- *Multi-functions* that recursively go through the tree.



## MULTI-ML: Tree recursion


### Recursion structure

```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

## MULTI-ML: Tree recursion

### Recursion structure


```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

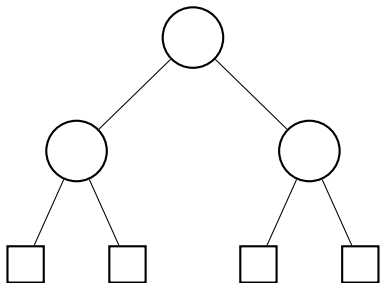

## MULTI-ML: Tree recursion

### Recursion structure


```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

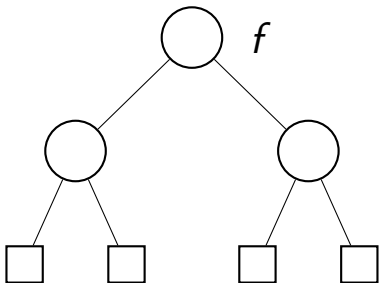

## MULTI-ML: Tree recursion

### Recursion structure


```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

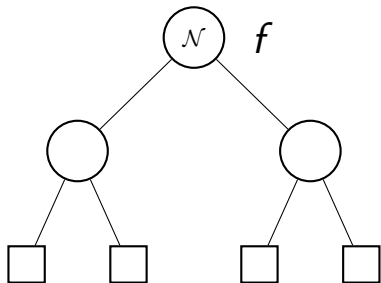

## MULTI-ML: Tree recursion

### Recursion structure


```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

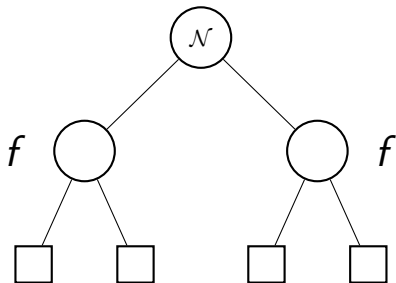

## MULTI-ML: Tree recursion

### Recursion structure


```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

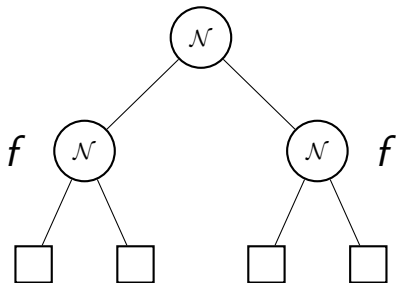

## MULTI-ML: Tree recursion

### Recursion structure

```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

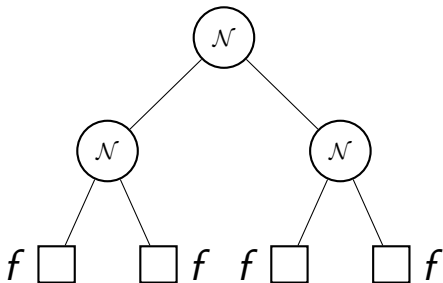




## MULTI-ML: Tree recursion

### Recursion structure


```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

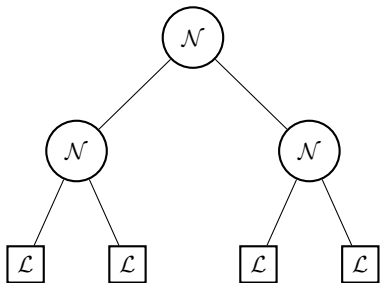

## MULTI-ML: Tree recursion

### Recursion structure


```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

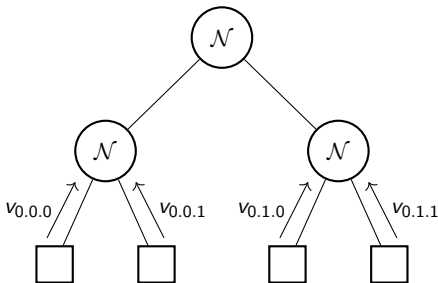

## MULTI-ML: Tree recursion

### Recursion structure


```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

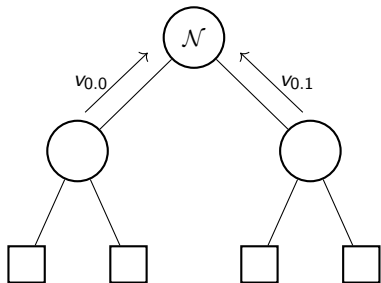

## MULTI-ML: Tree recursion

### Recursion structure

```
let multi f [args]=  
  where node =  
    (* BSML code *)  
    ...  
    << f [args] >>  
    ... in v  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

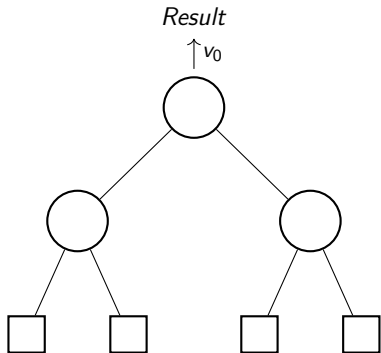

## MULTI-ML: Tree construction


### Tree construction

```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

## MULTI-ML: Tree construction

### Tree construction


```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* DCaml code *)  
    ... in v
```

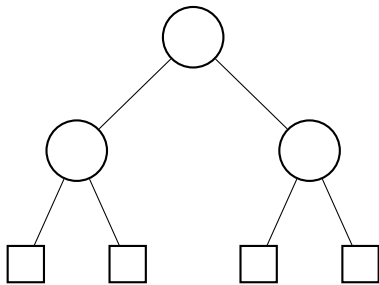

## MULTI-ML: Tree construction

### Tree construction


```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* DCaml code *)  
    ... in v
```

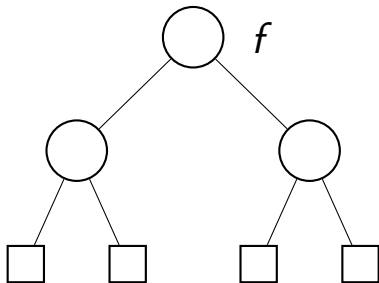

## MULTI-ML: Tree construction

### Tree construction

```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

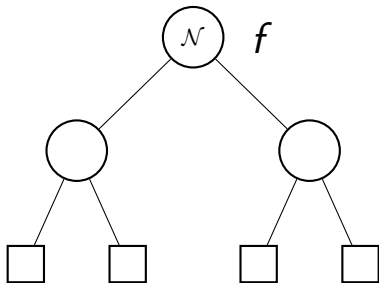




## MULTI-ML: Tree construction

### Tree construction


```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

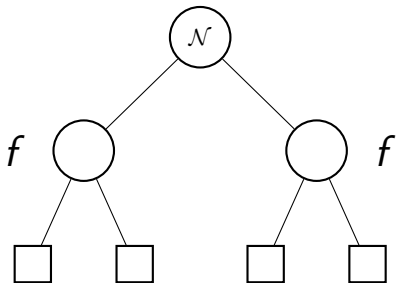

## MULTI-ML: Tree construction

### Tree construction


```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* DCaml code *)  
    ... in v
```

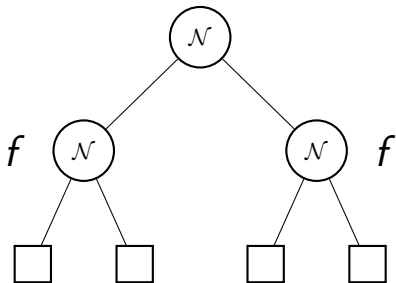

## MULTI-ML: Tree construction

### Tree construction


```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* DCaml code *)  
    ... in v
```

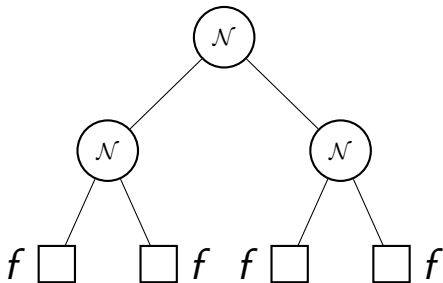

## MULTI-ML: Tree construction

### Tree construction


```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* DCaml code *)  
    ... in v
```

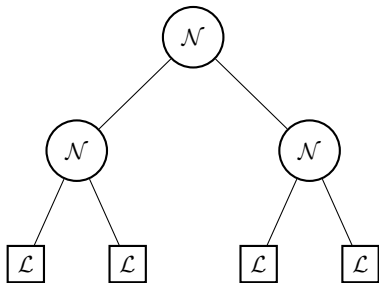

## MULTI-ML: Tree construction

### Tree construction


```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* OCaml code *)  
    ... in v
```

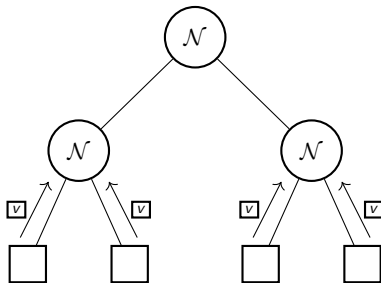

## MULTI-ML: Tree construction

### Tree construction


```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* DCaml code *)  
    ... in v
```

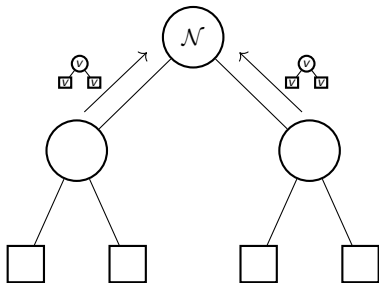

## MULTI-ML: Tree construction

### Tree construction

```
let multi tree f [args]=  
  where node =  
    (* BSML code *)  
    ... in  
    (<< f [args] >>, v)  
  where leaf =  
    (* DCaml code *)  
    ... in v
```

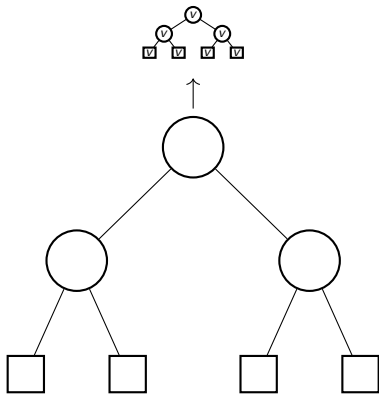

# Primitives


## Summary



# Primitives

## Summary


- `mktree e`

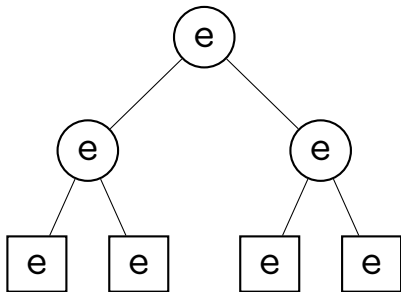

# Primitives

## Summary


- `mktree e`
- `gid`

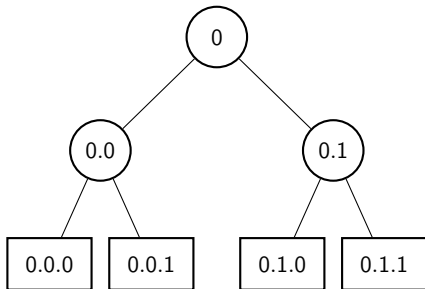

# Primitives

## Summary


- `mktree e`
- `gid`
- `at`

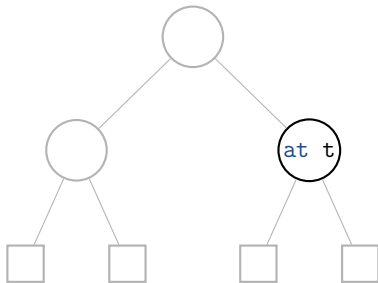

# Primitives

## Summary


- `mktree e`
- `gid`
- `at`

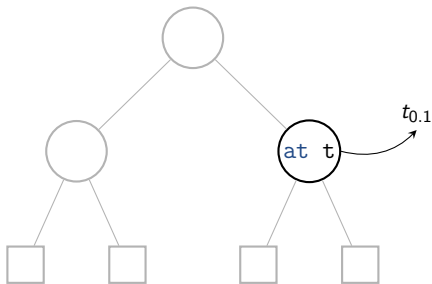

# Primitives

## Summary


- `mktree e`
- `gid`
- `at`
- `<<...f...>>`

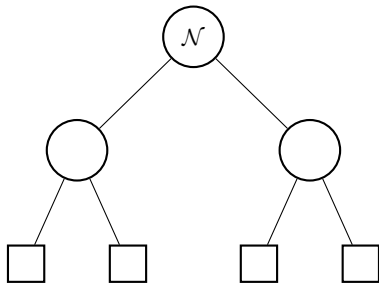

# Primitives

## Summary


- `mktree e`
- `gid`
- `at`
- `<<...f...>>`

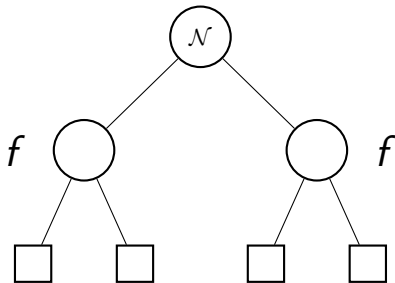

# Primitives

## Summary


- `mktree e`
- `gid`
- `at`
- `<<...f...>>`
- `#x#`

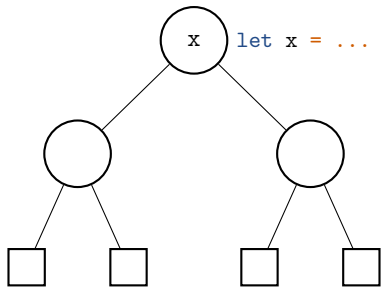

# Primitives

## Summary

- `mktree e`
- `gid`
- `at`
- `<<...f...>>`
- `#x#`

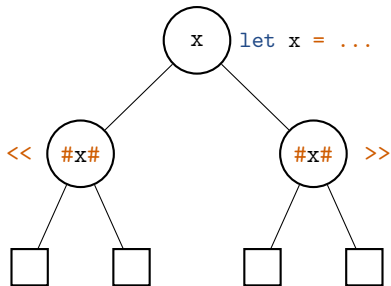




# Primitives

## Summary


- `mktree e`
- `gid`
- `at`
- `<<...f...>>`
- `#x#`

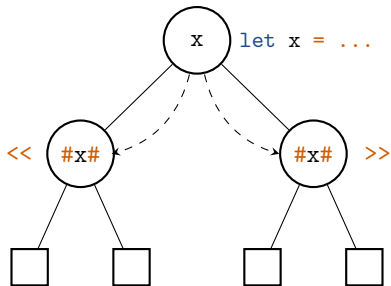

# Primitives

## Summary


- `mktree e`
- `gid`
- `at`
- `<<...f...>>`
- `#x#`
- `mkpar f`

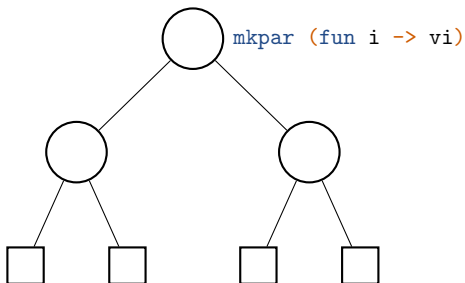

# Primitives

## Summary


- `mktree e`
- `gid`
- `at`
- `<<...f...>>`
- `#x#`
- `mkpar f`

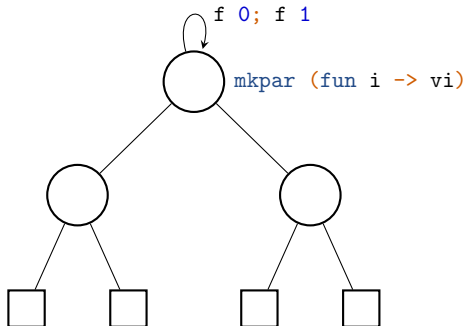

# Primitives


## Summary

- `mktree e`
- `gid`
- `at`
- `<<...f...>>`
- `#x#`
- `mkpar f`

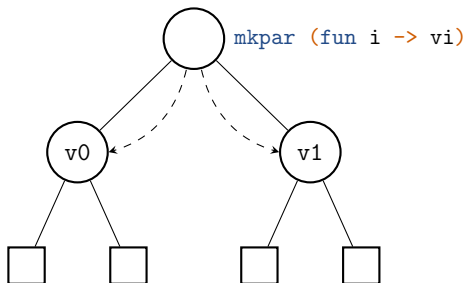

## Code example


Keep the intermediate results of the sum



```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```

## Code example


Keep the intermediate results of the sum



```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```

## Code example


Keep the intermediate results of the sum



```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```

## Code example

Keep the intermediate results of the sum




```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```



## Code example


Keep the intermediate results of the sum



```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```

## Code example


Keep the intermediate results of the sum



```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```

## Code example


Keep the intermediate results of the sum



```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```

## Code example


Keep the intermediate results of the sum



```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```

## Code example

Keep the intermediate results of the sum



```
let multi tree sum_list l =  
  where node =  
    let v = mkpar (fun i -> split i l) in  
    let rc = << sum_list $v$ >> in  
    let s = sumSeq (flatten << at $rc$ >>)  
    in (rc,s)  
  where leaf =  
    sumSeq l
```

## Formal definition of a core-language

Useful for:

- Study of properties
- Proof of programs/compiler/typing rules

## Currently

- Inductive big-step: confluent
- Co-inductive: mutually exclusive


## Purely Constraint-Based system : PCB(X)

- Constraint based
- Extension of DM's type system
- Easy to extend
- Related to HM(X)

## MULTI-ML type extension


- Add parallel constructions
- Introduce localities using effects ( $s$ ,  $\ell$ ,  $b$  and  $m$ )
- Control parallel structure imbrications

## Type localities







## Type localities

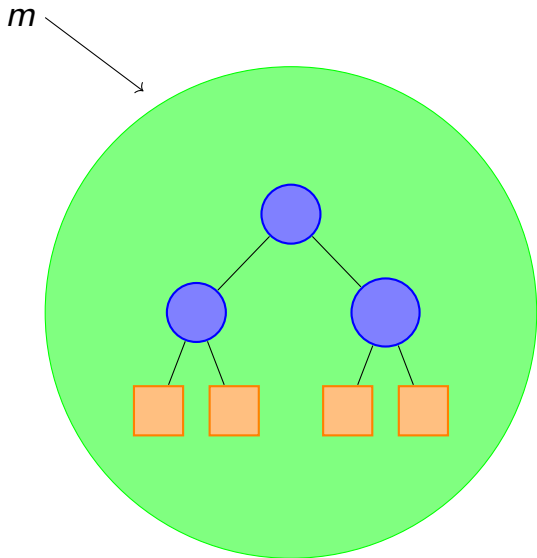


## Type localities

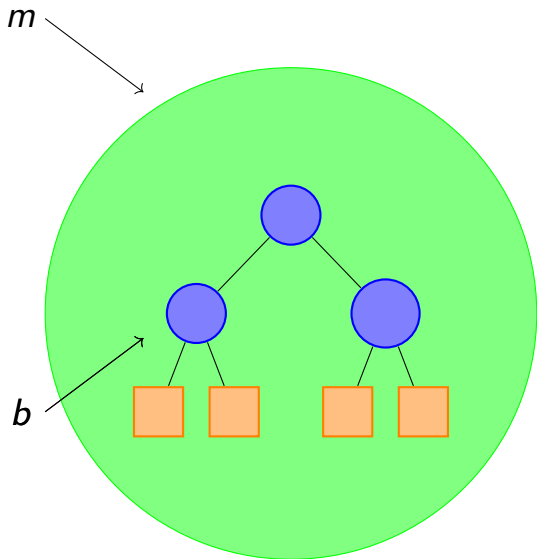


## Type localities

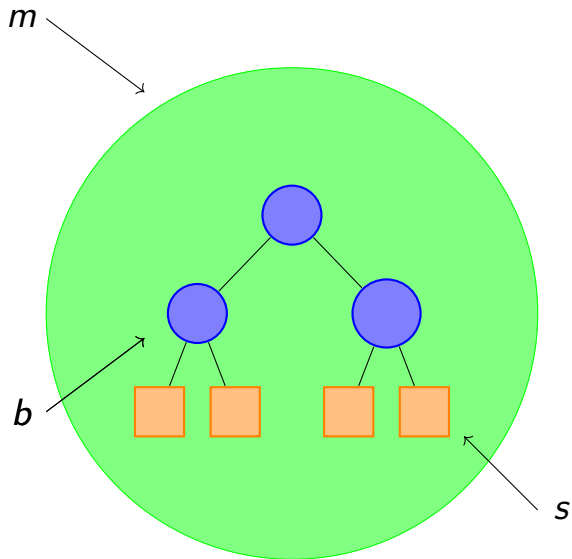


## Type localities

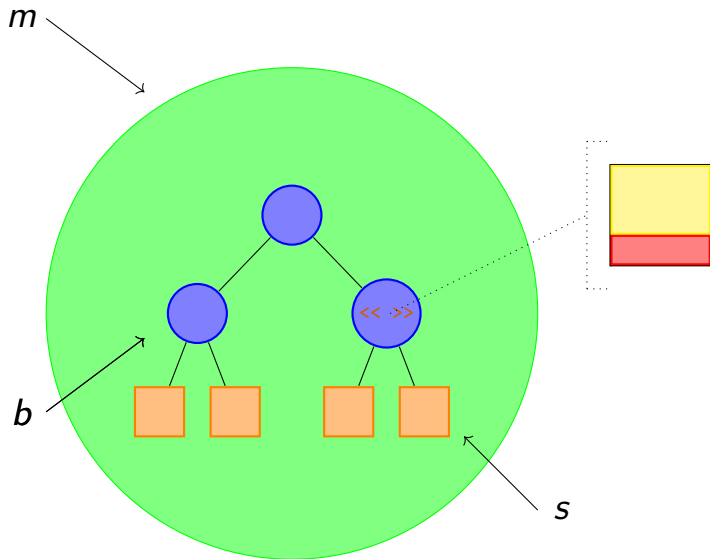


## Type localities

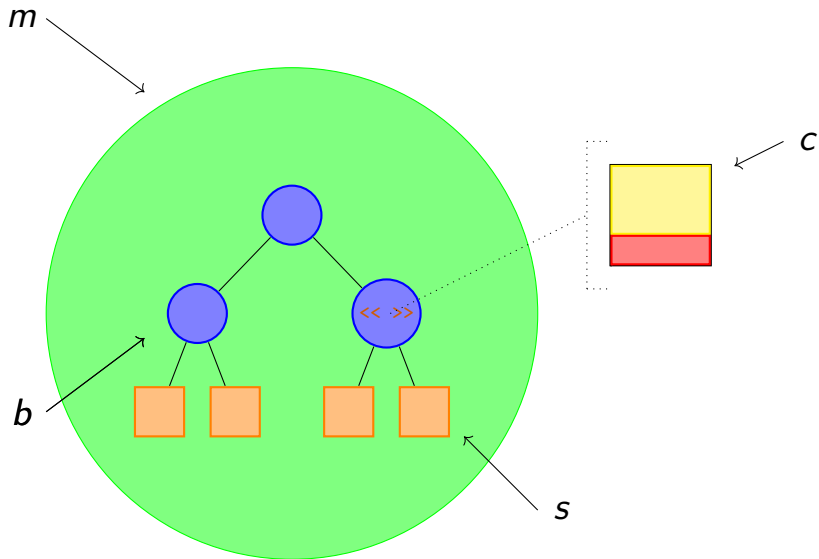


## Type localities

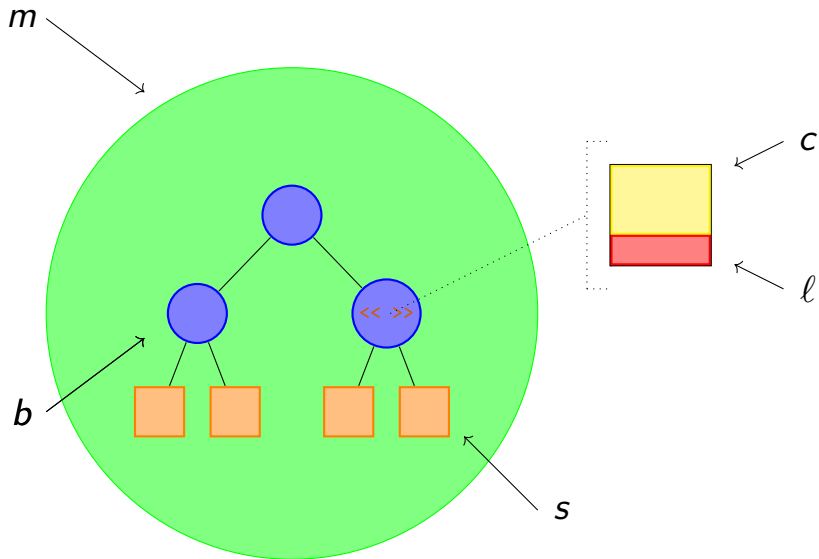


# Type localities

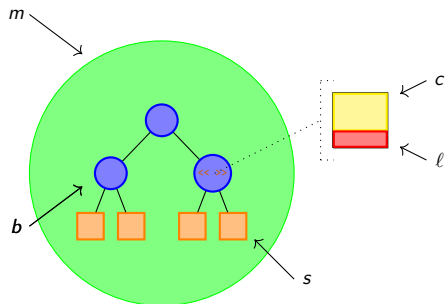

Accessibility:  $\triangleleft$



Definability:  $\triangleleft$



## Tagged type

$\tau$	$::=$	$\alpha_\pi$	<i>type variable</i>
		$\text{Base}_\pi$	<i>base type</i>
		$(\tau_\pi \xrightarrow{\pi} \tau_\pi)_\pi$	<i>arrow type</i>
		$(\tau_\pi, \tau_\pi)_\pi$	<i>pairs</i>
		$\tau_\pi \text{ Par}_b$	<i>parallel vector</i>
		$\tau_\pi \text{ Tree}_\pi$	<i>tree</i>

## Latent effect

$f : (\text{int}_a \xrightarrow{b} \text{int}_c \text{ par}_b)_m$



# Implementation

## Sequential simulator

- OCAML-like toplevel
- Test and debug
- Tree structure
- Hash tables to represent memories

```
#let multi tree f n =  
  where node =  
    let r = <<f ($pid$ + #n# + 1) >> in  
      (r, (gid^"=>"^n))  
  where leaf=  
    (gid^"=>"^n);;  
  
- : val f : int -> string tree = <multi-fun>  
# (f 0)  
o "0->0"  
|  
--o "0.0->1"  
| |--> "0.0.0-> 2"  
| |--> "0.0.1-> 3"  
--o "0.1->2"  
| |--> "0.1.0-> 3"  
| |--> "0.1.1-> 4"
```

# Distributed implementation

## Our approach

- Modular
- Generic functors
- Communication routines
- Portable on shared and distributed memories

# Distributed implementation

## Our approach

- Modular
- Generic functors
- Communication routines
- Portable on shared and distributed memories

## Current version

- Based on MPI
- SPMD
- One process for each nodes/leaves
- Distributed over physical cores
- Shared/Distributed memory optimisations

# Table of Contents

① Introduction

② Multi-ML

③ Results

④ Conclusion


### Naive Eratosthenes algorithm

- $\sqrt{(n)}$ th first prime numbers
- Based on scan
- Unbalanced

## Benchmarks

### Naive Eratosthenes algorithm


- $\sqrt{(n)}$ th first prime numbers
- Based on scan
- Unbalanced

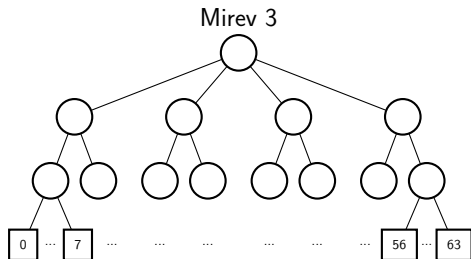

## Benchmarks

### Naive Eratosthenes algorithm

- $\sqrt{(n)}$ th first prime numbers
- Based on scan
- Unbalanced

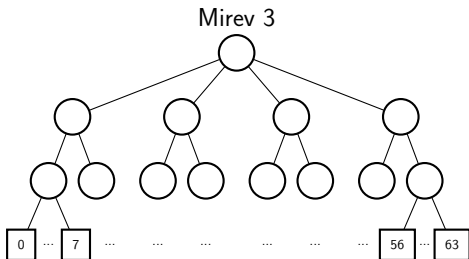

### Results

	100_000		500_000		1_000_000	
	MULTI-ML	BSML	MULTI-ML	BSML	MULTI-ML	BSML
8	0.7	1.8	22.4	105.0	125.3	430.7
64	0.3	0.3	1.3	8.7	4.1	56.1
128	0.5	0.45	2.1	5.2	4.7	24.3

# Table of Contents

- ① Introduction
- ② Multi-ML
- ③ Results
- ④ Conclusion**



# Conclusion

MULTI-ML

## MULTI-ML

- Recursive multi-functions

## MULTI-ML

- Recursive multi-functions
- Structured nesting of BSML codes

### MULTI-ML

- Recursive multi-functions
- Structured nesting of BSML codes
- Big-steps formal semantics (confuent)

## MULTI-ML

- Recursive multi-functions
- Structured nesting of BSML codes
- Big-steps formal semantics (confluent)
- Type system

### MULTI-ML

- Recursive multi-functions
- Structured nesting of BSML codes
- Big-steps formal semantics (confluent)
- Type system
- Small number of primitives and little syntax extension

### Current/Future work

### MULTI-ML

- Recursive multi-functions
- Structured nesting of BSML codes
- Big-steps formal semantics (confluent)
- Type system
- Small number of primitives and little syntax extension

### Current/Future work

- Optimise MPI implementation

## MULTI-ML

- Recursive multi-functions
- Structured nesting of BSML codes
- Big-steps formal semantics (confluent)
- Type system
- Small number of primitives and little syntax extension

## Current/Future work

- Optimise MPI implementation
- Type system for MULTI-ML



### MULTI-ML

- Recursive multi-functions
- Structured nesting of BSML codes
- Big-steps formal semantics (confluent)
- Type system
- Small number of primitives and little syntax extension

### Current/Future work

- Optimise MPI implementation
- Type system for MULTI-ML
- Real life benchmarks

Merci !

Any questions ?